

ALPHA™


FOR TRI-TEMPERATURE KELVIN AND
NON-KELVIN TESTING

TEST CONTACTING SOLUTION (PATENT PENDING)

Alpha/Alpha-Kelvin is widely accepted and the industry leader used for Automotive and Power applications that require consistent contact resistance [Cres/RDS(on)] along with device under test temperature controlled $\pm 2^{\circ}\text{C}$ and long mechanical life in production environments.

Alpha test contacting solutions are available in Kelvin, Selective-Kelvin and Non-Kelvin configurations and are compatible with most spring probe platforms due to Alpha's straight-thru contact technology for SOIC, TSOP, QFP, QFN, DRQFN etc. packages.

DO YOU NEED	ALPHA OFFERS
Self cleaning	Scrubbing (< 0.15mm)
Sustainable CRes	Single piece cantilever pin (< 30mΩ)
High current testing	> 3.2A continuous
Temp testing of - 60°C to +180°C	Reliable temp test with single piece pin construction
Longer lifespan test solution	> 500K insertion (pin) > 6M insertion (housing)
Sustainable 1 st Pass Yield (FPY)	Longer MTBA & MTBF
Loadboard friendly	No wearing on loadboard
Lower Cost of test (CoT)	Higher OEE

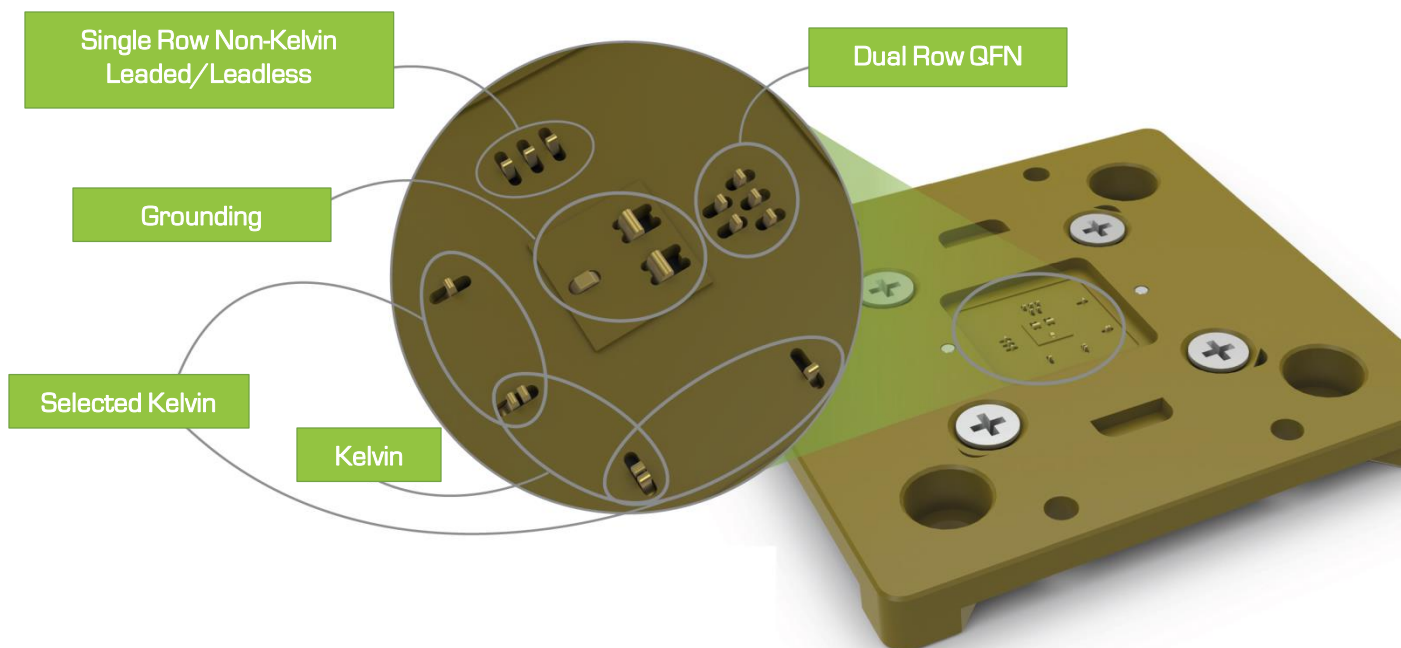


Package range : SOIC, SOP, MSOP, TSOP, QFP, DFN, QFN, DRQFN etc.
 Pitch : $\geq 0.4\text{mm}$

ALPHA™ TEST CONTACTING SOLUTION

Design Features

- ✓ Mechanical robustness
- ✓ Versatile and cost effective
- ✓ Excellent Current Carrying Capacity (CCC)
- ✓ Thermal Conditioning Channel (TCC) Technology
- ✓ Short Wiping Stroke (SWS) Technology
- ✓ Advanced Contact Finish (ACF) Technology

Mechanical Specification	Alpha Inner	Alpha Outer
Physical Pin Length (mm)	7.97	9.55
Pin Uncompressed Height (mm)	3.43	
Pin Compliance (mm)	0.20	
Pin Wiping Length (mm)	< 0.15	< 0.10
Gram Force Per Pin (g)	20 ~ 30	10 ~ 15
Number of Insertion- Housing	≥ 6M	
Number of Insertion- Pin (Matte Tin)	≥ 500K	
Number of Insertion- Pin (NiPd)	≥ 300K	
Operating Temperature (°C)	- 60 to +180	
Socket Material	Torlon® 5030 or equivalent	
Contact Pin Material	BeCu - Ni-Au	

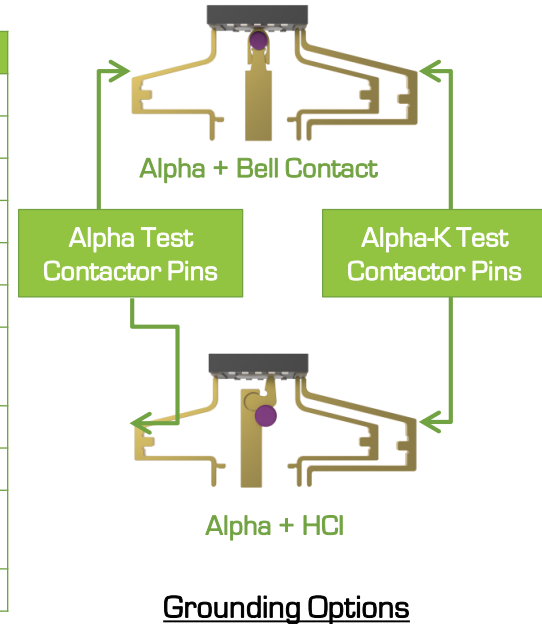

Electrical Specification ^①	Single Contact (Non-Kelvin)	Dual Contact (Kelvin)
Self Inductance (nH)	3.68	3.58
Mutual Inductance (nH)	1.64	1.60
Self Capacitance (pF)	0.35	0.65
Mutual Capacitance (pF)	0.26	0.55
Current Carry Capacity - CCC (A) <i>Duty Cycle 100%, 75%, 50%, 25%, 1% (300ms)</i>	3.2, 3.8, 4.3, 6.3, 17.0	
Resistance (mΩ)	≤ 30.00	10.00
S21 (Insertion Loss/Bandwidth) (GSG)	- 1dB @ 13.7GHz	- 1dB @ 3.6GHz
S11 (Return Loss/Bandwidth) (GSG)	- 20dB @ 1.0GHz - 10dB @ 4.6GHz	- 20dB @ 1.9GHz - 10dB @ 3.2GHz
S41 (Crosstalk/Bandwidth) (GSSG)	- 20dB @ 0.9GHz	- 20dB @ 0.6GHz

① Results for 0.2mm thickness of pin

Note * : The stated specifications are based on JF Microtechnology's Laboratory Test; the results may vary subjected to the test environment conditions. Information furnished by JF Microtechnology is believed to be accurate and reliable. However, no responsibility is assumed by JF Microtechnology for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of JF Microtechnology. Trademarks and registered trademarks are the property of their respective owners.

Sales & Service Representatives